


HIPRO Series Belts

Conveyor belts especially designed for use in difficult working conditions.

Applications: paper and cardboard industry, graphic arts, sheet metal, etc.

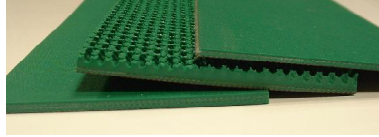

- EXCELLENT RESISTANCE TO ABRASION
- 100% ANTI-STATIC STANDARD ISO 284
- GOOD MECHANICAL PERFORMANCE
- THERMOWELDABLE (ENDLESS SPLICE BY FUSION)

HIPRO 12Y1R

HPVC TOP COVER WITH PATTERN Y1	TOTAL THICKNESS: 2 mm
COLOUR GREEN 23	BOTTOM FABRIC IMPREGNATED WITH BLACK RC.
PLIES: 2	
MIN. PULLEY DIAMETER: 25 mm	MAX. ROLL WIDTH: 2.000 mm

HIPRO 18Y1R

HPVC TOP COVER WITH PATTERN Y1	TOTAL THICKNESS: 3 mm
COLOUR GREEN 23	BOTTOM FABRIC IMPREGNATED WITH BLACK RC.
PLIES: 3	
MIN. PULLEY DIAMETER: 50 mm	MAX. ROLL WIDTH: 2.000 mm

HIPRO 12GR

HPVC TOP COVER WITH PATTERN G	TOTAL THICKNESS: 5.10 mm
COLOUR GREEN 23	BOTTOM FABRIC IMPREGNATED WITH BLACK RC.
PLIES: 2	
MIN. PULLEY DIAMETER: 50 mm	MAX. ROLL WIDTH: 2.000 mm

HIPRO 13GR

HPVC TOP COVER WITH PATTERN G	TOTAL THICKNESS: 6,50 mm
COLOUR GREEN 23	BOTTOM FABRIC IMPREGNATED WITH BLACK RC.
PLIES: 2	
MIN. PULLEY DIAMETER: 60 mm	MAX. ROLL WIDTH: 2.000 mm