

Mesh Belts]

These conveyor belts are made of polyester monofilaments. The thickness of the monofilaments and its number can be varied, in order to diminish or to enhance the density of the fabric mesh. These conveyor belts are used as vacuum belt, for drying applications or for de-watering operations.




These conveyor belts are used as:

- Vacuum belts and for
- De-watering operations
- Drying application

de produits divers en continu.



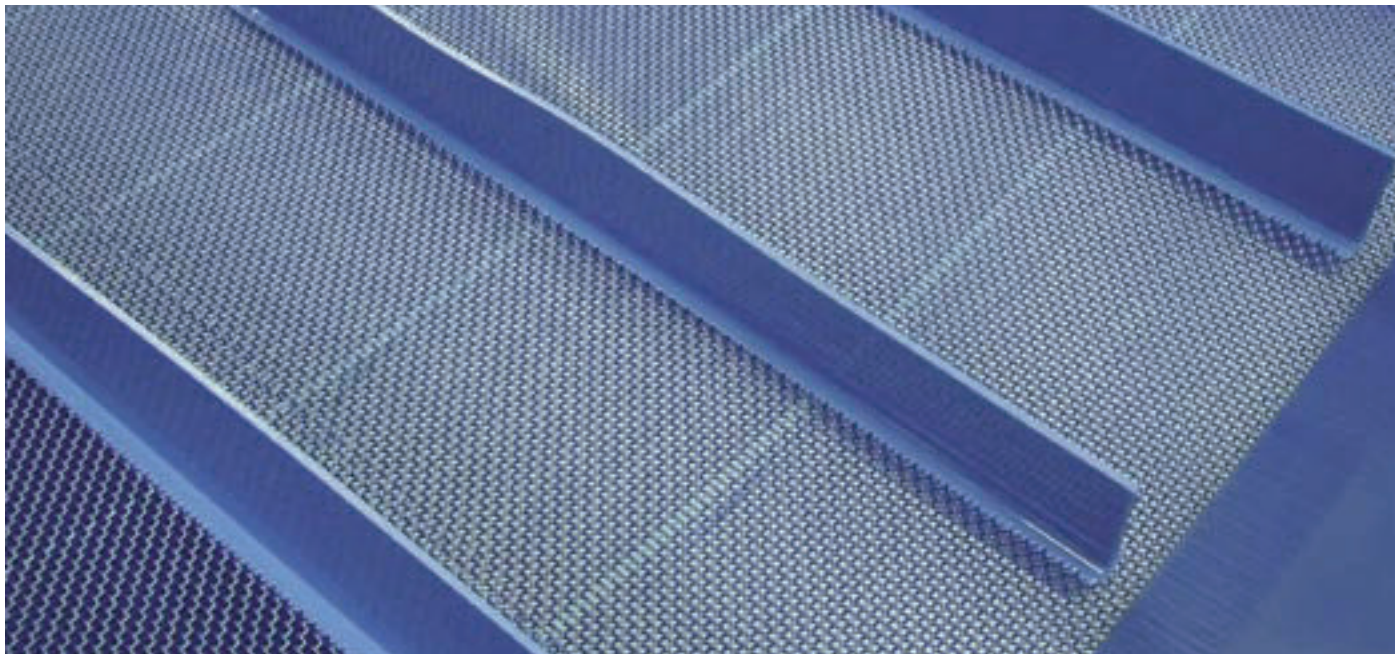

- FDA approved
- Diameter of monofilaments from 0.8 to 1.2 mm
- Different density of fabrics available
- Bords renforcés latéralement
- Tear strength till 180 daN / cm
- Different equipment available :
 - **Compartment sidewalls**
 - **Tracking guides**
 - **Different flights**
 - **Fingers**
- Made endless either with fasteners or with a special reinforced joint.
- Standard width till : 1500 mm
- Minimum pulley diameter : 100 mm (excluding equipment)

Please contact us if you require additional information.